DIRECTIONAL LIGHTS
DL-21-SERIES

LED READY

TYPE

SPECIFICATIONS

CONSTRUCTION: Cast aluminum, brass or composite Bullet; matching cast aluminum, brass or composite adjustable swivel

LENS: High impact clear tempered convex glass

O-RING: High temperature red silicone

LAMP SUPPLIED: 20 watt MR16 FL(BAB) 5000 hours average rating (50w max)

LAMP OPTIONS: We recommend 20 watt MR16 ULTRA10, 000 hours average rating; 20 watt MR16 TITAN 18, 000 hours average rating; 4w ARROW LED 50,000 average rating

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v. only)
For 25 foot 16/2 fixture lead wire add **-25F** to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-03 black 9" ABS stake threaded 1/2" NPS

FINISH: Aluminum-Black texture polyester powder coat; optional finishes available
Brass-Unfinished brass; optional finishes available

NOTE: ARROW LED MR16 must be factory installed to fit properly

Arrow LED
LEDS by CREE

10,000 HOUR MR16 ULTRA
18,000 HOUR MR16 TITAN



DL-21

DL-21-BRS
mounted on
FA-24-BRS

IP54 CE ETL LISTED US

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-21-BLT	Cast aluminum Bullet	20w MR16 FL(BAB)	2.0 lbs.
DL-21-BRS	Cast brass Bullet	20w MR16 FL(BAB)	3.0 lbs.
CDL-21	Composite Bullet	20w MR16 FL(BAB)	2.0 lbs.

MOUNTING ACCESSORIES



FA-01/BRS

FA-03-RX/-BRS



FA-03/BRS



FA-03-LG


FA-111-TREE
(10"-41")

FA-111


FA-22-TREE
(10"-41")

FA-24MD-CST-TREE
(10"-41")

FA-24-T10-
BRS-BLT



FA-24-Strap-10



FA-30-4 FA-30-8



FA-24/BRS



FA-YAD



C/FA-25/BRS



C/FA-26-75W/BRS

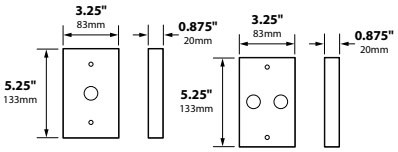

FA-22-CST / -BRS
FA-22-BRS

FA-23-CST / -BRS
FA-23-BRS



FA-24-LG-SPUN / -BRS
FA-24-LG-CST / -BRS



FA-24-LG-DH-SPUN / -BRS
FA-24-LG-DH-CST / -BRS



FA-30 FA-31 FA-32 FA-33 FA-34
-BRS = Brass Models (Arrow: couplers)
STEM EXTENSIONS



FA-24-MD-CST-POST/-BRS



FA-24-MD-CST-PC/-BRS



FA-24-MD-CST/-BRS

BEAM/GLARE CONTROL ACCESSORIES

FA-08-21	Round 1/8" Hex Cell Louver
FA-11-BLUE	Blue Tempered Glass Lens
FA-11-GREEN	Green Tempered Glass Lens
FA-98	Linear Spread Tempered Glass Lens
FA-99	High Impact Clear Tempered Convex Glass
FA-104	Wide Spread Tempered Glass Lens Softener

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



FL-13-BAB-FG

JOB INFORMATION

Type: Date:

Job Name:

Cat. No.:

Lamp(s):

Specifier:

Contractor:

Notes:

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630
www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

FSA-00

Powder Coat Finishes	Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta
Ordering Code	*-BLT*	*-ATV*	*-BRT*	*-CAM*	*-WTX*	*-HTX*	*-RST*	*-WIR*	*-WBR*	*-STU*	*-RBV*	*-CPR*	*-TRC*